Software Update 5.61 for Palette™ Version 5.x
(April 2004)

Palette Version 5.61 Features:

Design Center:
- Fixes an error in generating non-sewing parts of some outlines

Important Note for EMP6 Embroidery Professional Users:

- To use designs with the Cap Frame of the EMP6 you must have EMP6 software Version 1.22 or higher when using this update

How to update your Palette 5.02, 5.5, or 5.6 to version 5.61:

How to download the update program to your hard drive:

1. Create a temporary folder (ex. C:\Temp) on your PC in which the downloaded update file will be saved.
2. Download the **Palette 5.61 Update** in the language of your choice from the Baby Lock Web (http://www.babylock.com/downloads/) to the newly created folder on your PC.

How to update your Palette 5.x to 5.61:

For Palette 5.02 or later users:
1. Disconnect the USB Card Reader/Writer Box from your PC
2. Double-click on the downloaded "palTo5.61_Eng/Fre/Spa.exe" file from Windows® Explorer. Or go to Start menu on Task bar, select Run and input "palTo5.61_Eng/Fre/Spa.exe" file name, click OK.
The update process will automatically start.
3. Follow the instructions and proceed through the update process. You may encounter the dialog, "If you are using Palette PTS in addition to Palette, files for Palette PTS can be updated at this time. Are you using PTS? Yes or No." CLICK NO at this time.
4. After the installation process finishes, re-connect the USB Card Reader/Writer Box to your PC. If Hardware Wizard asks for the location of the driver, DO NOT USE THE PALETTE 5.0 CD TO INSTALL DRIVER; you will need to locate the folder where you have stored Palette 5.61 update and point the Wizard there. See the illustrations below for your operating system and follow the steps to install the USB driver.

For Palette 5.00 or 5.01 users:
1. Disconnect the USB Card Reader/Writer Box from your PC
2. Double-click on the downloaded "palTo5.61_Eng/Fre/Spa.exe" file from Windows® Explorer. Or go to Start menu on Task bar, select Run and input "palTo5.61_Eng/Fre/Spa.exe" file name, click OK.
The update process will automatically start.
3. Follow the instructions and proceed through the update process.
4. After the installation process finishes, re-connect the USB Card Reader/Writer Box to your PC. Follow the instructions below to complete the installation.

Windows® 98, ME, 2000 Users:
> Go to Step 5

Windows® XP Users:
> Go to Step 6

5. **[For Windows® 98, ME, 2000 Users only]**
The Hardware Wizard will be launched automatically.
To install the new device driver for the USB Reader/Writer Box, please specify the previously created temporary folder (ex. C:\Temp) where the download file is stored.

Windows® 98

Windows® ME

Windows® 2000

Once the Hardware Wizard finishes, Palette will be updated and ready to use.

6. **[For Windows XP users only]**
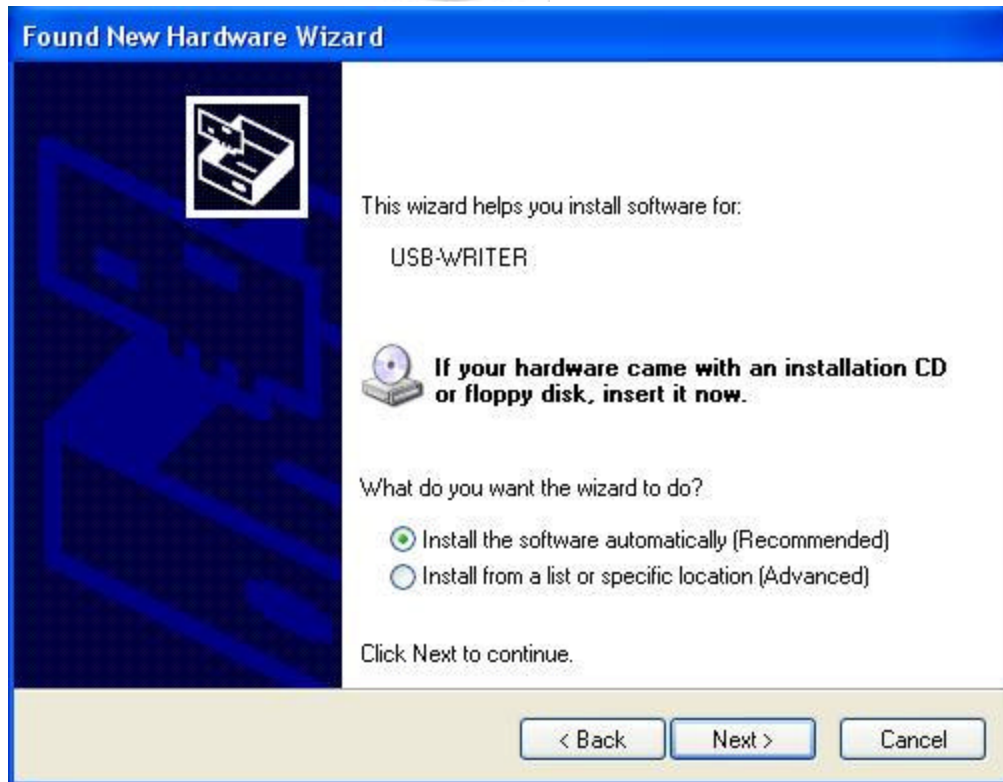 **(If Your PC is connected to Internet)**

[If you have installed Windows XP Service Pack 2...]

 When you connect your USB Reader/Writer Box to your PC,
 the Hardware Wizard will be launched automatically.

Found New Hardware Wizard

Welcome to the Found New Hardware Wizard

Windows will search for current and updated software by looking on your computer, on the hardware installation CD, or on the Windows Update Web site (with your permission).
Read our privacy policy

Can Windows connect to Windows Update to search for software?

⦿ Yes, this time only
◯ Yes, now and every time I connect a device
◯ No, not this time

Click Next to continue.

< Back   Next >   Cancel

*In some cases, the above window would not appear and you would see the next window as your first step.

⬇

Once the Hardware Wizard finishes, Palette will be updated to Version 5.61 and ready to use.

[If you have NOT installed Windows XP Service Pack 2, yet...]

When you connect your USB Reader/Writer Box to your PC,
you will see the following message sequentially and the installation
will be completed automatically.

After "Your new hardware is installed and ready to use."is displayed,
Palette will be updated to Version 5.61 and ready to use.

*If the message is not displayed and the installation is not completed,
please follow the procedures below.

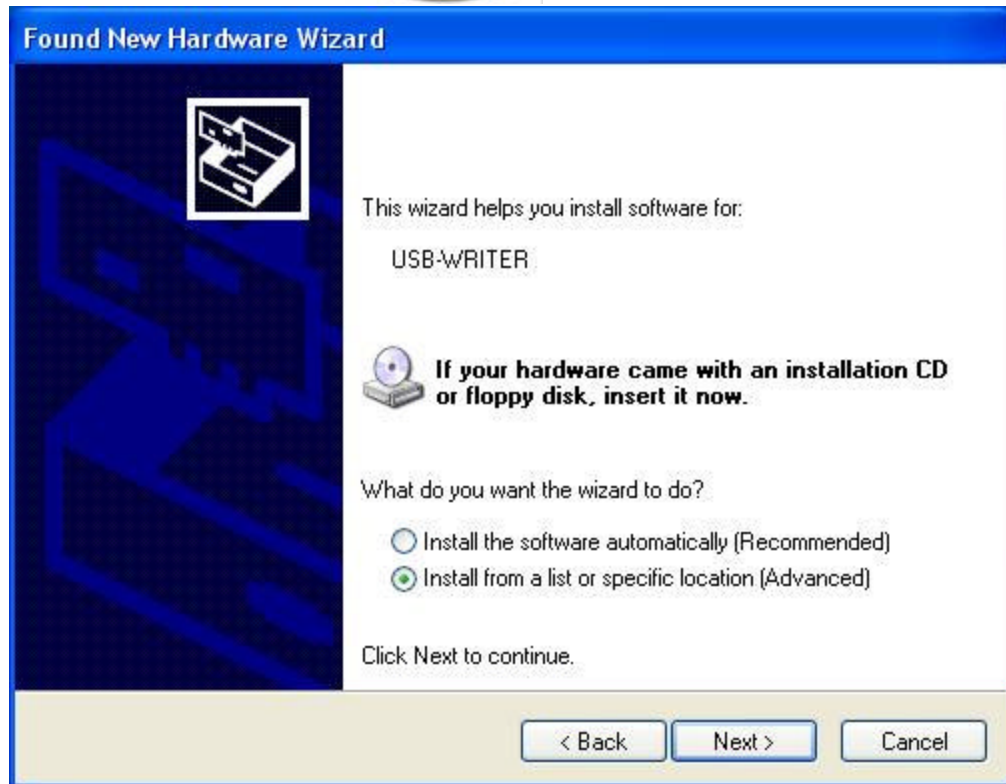### (If Your PC is NOT connected to Internet)

[If you have installed Windows XP Service Pack 2...]

When you connect your USB Reader/Writer Box to your PC,
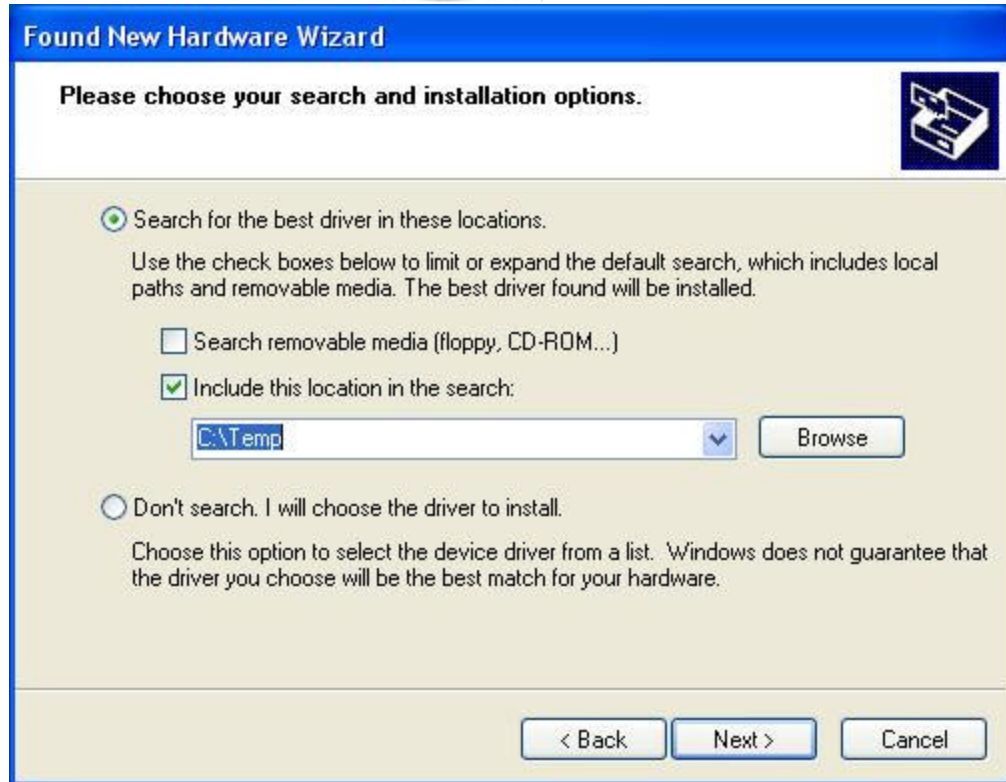the Hardware Wizard will be launched automatically.

*In some cases, the above window would not appear and you would see the next
window as your first step.

↓

baby lock

Found New Hardware Wizard

This wizard helps you install software for:

USB-WRITER

If your hardware came with an installation CD or floppy disk, insert it now.

What do you want the wizard to do?

○ Install the software automatically (Recommended)

◉ Install from a list or specific location (Advanced)

Click Next to continue.

[< Back]   [Next >]   [Cancel]

↓

To install the new device driver for the USB Reader/Writer Box, please specify the previously created temporary folder (ex. C:\Temp) where the downloaded file should be stored.
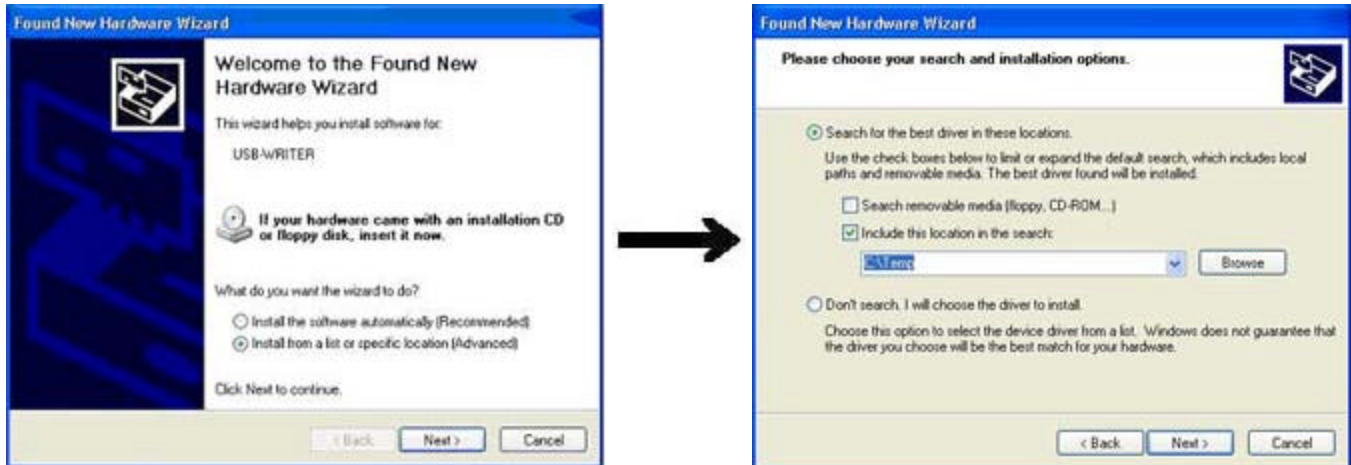
Found New Hardware Wizard

Please choose your search and installation options.

◉ Search for the best driver in these locations.

Use the check boxes below to limit or expand the default search, which includes local paths and removable media. The best driver found will be installed.

☐ Search removable media (floppy, CD-ROM...)

☑ Include this location in the search:

C:\Temp   [Browse]

○ Don't search. I will choose the driver to install.

Choose this option to select the device driver from a list. Windows does not guarantee that the driver you choose will be the best match for your hardware.

[< Back] [Next >] [Cancel]

Once the Hardware Wizard finishes, Palette will be updated to Version 5.61 and ready to use.

[If you have NOT installed Windows XP Service Pack 2, yet...]

When you connect your USB Reader/Writer Box to your PC, the Hardware Wizard will be launched automatically.
To install the new device driver for the USB Reader/Writer Box, please specify the previously created temporary folder (ex. C:\Temp) where the downloaded file should be stored.

Once the Hardware Wizard finishes, Palette will be updated to Version 5.61 and ready to use.

Troubleshooting
If installation is unsuccessful following these steps, please refer to the following URL:
http://www.babylock.com/support/Palette5/